



is the most effective advertising solution in the industry. It turns passersby into an audience, and a building into a billboard—a vivid, multi-colored, multi-

messaging platform with endless revenue generating possibilities. BROADCAST custom printing leads the industry with the following features:

**Full Color:** A full range of eye-catching colors.

**Maximum-size:** The largest printing area available.


**Multi-messaging Capability:** Select multiple messages and images for your building wrap.

**Flexible Order Size:** Orders as small as eight rolls, and as large as needed.

Call our experts at 330-528-0684 to find out how custom printing can expand your business!



"I had my client's name and number printed on my 8-roll DRYline order, and they helped cover my costs."

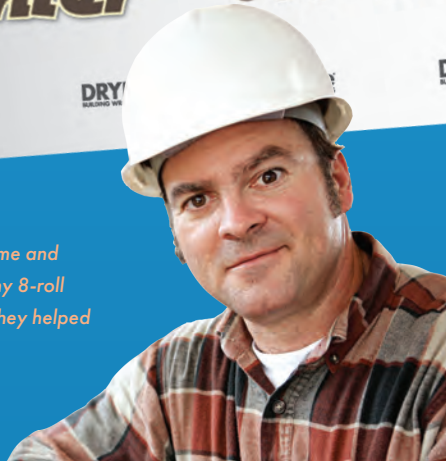

W



Professional contractor grade for moderate to severe weather

### TYPICAL PHYSICAL PROPERTIES

PROPERTY	TEST METHOD	TYPICAL PROPERTY
Tensile Strength (MD/CD)	ASTM D 828 (lbs/inch)	46/36
Basis Weight	ASTM D 5261 (lbs/MSF)	13.3
Water Vapor Transmission Rate	ASTM E 96, Method A (grams/m <sup>2</sup> /24 hours)	70
Water Vapor Permeance	ASTM E 96, Method A (perms)	10
Water Resistance	ASTM D 779 (minutes)	60
Air Resistance	TAPPI T 460 (seconds/100cc)	14
Flame Spread Index	ASTM E 84	Class A
Smoke Developed Index	ASTM E 84	Class A
Ultra Violet Light Exposure (UV)		300 Days
Air Barrier System	ASTM E 2357	<0.2 L/s/m <sup>2</sup> @ 75Pa

Test data is based on average results and is not limiting specifications. Normal manufacturing variation may produce results above or below typical data and should not be considered or interpreted as minimum or maximum values.

### WARRANTY INFORMATION

A ten (10) year limited warranty applies to DRYline W building wrap. To obtain a copy of this warranty, please visit [drylinewrap.com](http://drylinewrap.com) or call 800-552-7775. No other warranty, express or implied, is given, including any implied warranty of merchantability or of fitness for a particular purpose.



### PRECAUTIONS

**Warning:** Protect from high heat or other ignition sources during shipment, storage and application.

### STORAGE

Protect DRYline building wrap from exposure to direct sunlight during storage. It is recommended that building wrap be stored inside or under cover.

### ROLL SIZES

- 3' X 150'
- 4.5' X 150'
- 5' X 150'
- 9' X 100'
- 9' X 150'
- 9' X 195'
- 10' X 100'
- 10' X 150'
- 10' X 195'



National Shelter Products  
10 West Streetsboro Street #207  
Hudson, OH 44236  
330-528-0684  
support@drylinewrap.com  
drylinewrap.com

© 2019 National Shelter Products, Inc. All rights reserved. DRYline® is a registered trademark of National Shelter Products, Inc. BROADCAST® is a registered trademark of Jumpstart Consultants, Inc. 103-001-01/202103

# DRYline®

## BUILDING WRAP SYSTEMS




# DRAW THE LINE BETWEEN YOU AND THE ELEMENTS.

DRYline®	W	LP	HP
Meets Building Codes	☔	☔	☔
Energy Efficient	☔	☔	☔
Optimal UV Resistance	☔	☔	☔
Superior Tear Strength	☔	☔	☔
BROADCAST Custom Printing	☔	☔	☔
Enhanced Multi-Directional Drainage Plane	☔ <small>* System</small>	☔	☔
Certified Air Barrier	☔	☔	☔
More Robust Water Resistance	☔	☔	☔

**DRYline® W** is the best weather barrier available for value-oriented projects needing moderate to severe weather protection. Its woven polyolefin fabric construction provides exceptional strength and durability at a low weight, and at an attractive price. Balanced breathability and reliable water-resistance combine to make it the best value in commercial-grade weather protection. DRYline W is an excellent choice for almost all exterior siding materials, including wood, composite panels, vinyl, stucco, brick, stone, masonry, metal, and insulated sheathings. It's also available with the best custom printing in the industry, BROADCAST® custom printing.

**Stronger:** DRYline W is cross-woven to resist tearing around fasteners and to endure tough jobsite conditions during installation.



**Moisture Protection:** DRYline W is water-resistant and provides reliable protection in finished wall assemblies.

**Breathable:** DRYline W is micro-perforated to allow moisture vapor to escape and to reduce the potential for condensation buildup.



**Longer UV Exposure:** DRYline W is treated to resist excessive degradation from normal UV exposure for up to 300 days.

**Energy Efficient:** DRYline W provides additional air resistance, and reduces drafts to increase the energy efficiency of a building.

**Simpler to Apply:** Lightweight, yet durable, DRYline W is translucent, which makes locating studs, openings, and corners quick and easy.

**Meets Building Codes:** DRYline W is rated for commercial projects, It meets or exceeds applicable building codes for weather resistant barriers and creates healthier, more energy-efficient buildings.

**Sustainable:** DRYline W is environmentally responsible and may contribute to your LEED and NGBP ratings.

**Warranty:** DRYline W comes backed by a 10-year limited warranty. See [drylinewrap.com](http://drylinewrap.com) for details.

